

# ARK-1122C

## Intel® Atom™ Dual Core N2600 with 4 COM Port Extendibility Fanless Box PC

**NEW**




### Features

- Intel® Atom™ Dual Core N2600, 1.6 GHz
- Palm-size form factor : 133.8(W) x 43.1(H) x 94.2(D) mm
- Supports 4 x COM ports (2 x RS-232 & 2 x RS-232/422/485, select by BIOS)
- Supports 1 x VGA and 4 x USB 2.0 ports
- Built-in 1 x half size Mini PCIe expansion slot (i.e.: Wi-Fi module)
- Supports mSATA storage (Hard drive bay by request)
- Wide operating temperature -20 ~ 60° C support
- Optional VESA / DIN-Rail / Wall mounts
- Lockable DC jack design
- IP40 sealed design
- Supports SUSIAccess and Embedded Software APIs

### Specifications

ARK-1122C-S6A1E		
Processor System	CPU	Intel Atom Dual Core N2600 1.6 GHz
	L2 Cache	1MB
	System Chipset	Intel NM10
	BIOS	AMI EFI 16 Mbit
Memory	Technology	DDR3 800 MHz, up to 4 GB
	Socket	1 x 204-pin SO-DIMM
Graphics	Chipset	Intel Atom N2600
	Interface	VGA (1920 x 1200)
Ethernet	LAN	1 x 10/100/1000 Mbps Intel 82583V GbE
I/O Interface	Serial Ports	2 x RS-232, 2 x RS-232/422/485, selected by BIOS
	USB Interface	4 x USB ports, USB2.0 Compliant (Standard) or 2 x USB ports (Option 2.5" drive bay version)
Other	Watchdog timer	255-level timer interval, setup by software
Expansion	Mini PCIe	1 x half-size Mini PCIe
	Storage	2.5" HDD/SSD mSATA
Software Support	Microsoft Windows	Windows 7 Pro, WES7, XP Embedded (XP Embedded by project support)
	Power Requirement	Power Input Voltage
Power Consumption	DC Jack Type	Support lockable design
	Power Adaptor	AC to DC, DC12 V/3 A, 36 W with lockable design
Mechanical	Typical	5.4 W
	Max	9.47 W
	Construction	Aluminum housing
Environmental and Certifications	Mounting	Support VESA/DIN Rail/Wall mounting (Optional)
	Dimensions (W x H x D)	133.8 x 43.1 x 94.2 mm (5.27" x 1.7" x 3.71")
	Operating Temperature	With standard temperature HDD/SSD/mSATA devices: 0 ~ 40° C With extended temperature SSD/mSATA devices: -20 ~ 60° C
Environmental and Certifications	Storage Temperature	-40 ~ 85° C
	Relative Humidity	95% @ 40° C (non-condensing)
	Vibration During Operation	With SSD/mSATA: 3Grms, IEC 60068-2-27, half sine, 11ms duration
	Shock During Operation	With SSD/mSATA: 30Grms, IEC 60068-2-27, half sine, 11ms duration
	EMC	CE/FCC Class A, CCC, BSMI
	Safety Certifications	CB, UL, CCC, BSMI

## Dimensions

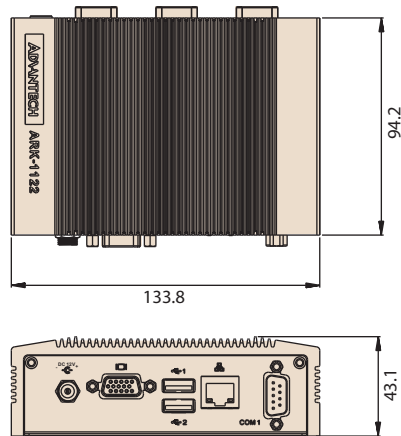


DIN Rail


Unit: mm

VESA mount


Wall mount

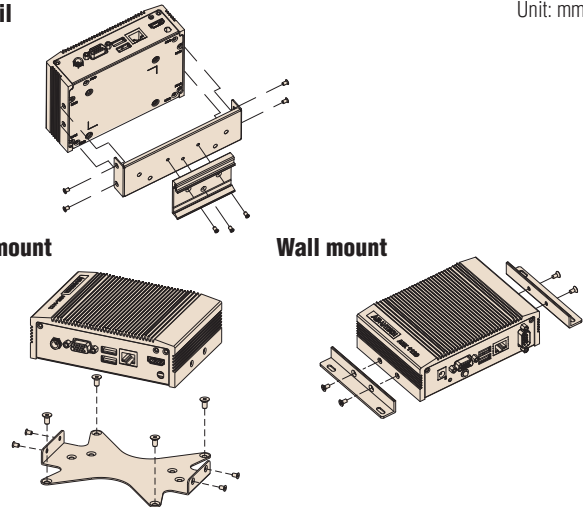

## Front Panel External I/O Mechanical Layout/Drawing

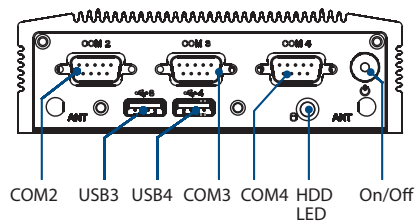

## Rear Panel External I/O Mechanical Layout/Drawing

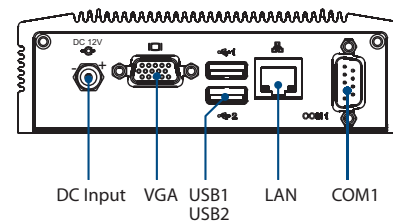

## Ordering Information

Part Number	Intel CPU	RAM	VGA	HDMI	Audio	GbE	2.5" HDD bay	mSATA Storage	USB 2.0	RS-232	RS-232/422/485	MiniPCIe	Operating Temp.
ARK-1122C-S6A1E	Atom N2600 1.6GHz	Up to 4GB	1	N/A	N/A	1	Optional by T-PN	1	4 (Standard) ; 2 (Option 2.5" HDD bay version)	2	2	1 Half size	-20 ~ 60° C

Note: Memory, storage and operating system bundled by request.

## Packing List

Part Number	Description
-	1 x ARK-1122 unit
-	1 x Driver/Utility CD/Manual
-	1 x Traditional Chinese user manual for CCC
-	1 x China RoHS
1757004096-01	1 x AC to DC adapter DC12 V/3 A 36 W, 0 ~ 40° C with lockable design

## Embedded OS

Part Number	Description
2070011881	WES7 for ARK-1122C
2070012167	XPE for ARK-1122C

## Optional Items

Part Number	Description
1700001524	Power Cable 3-pin 180cm, USA type (For power adapter 1757004096-01)
170203183C	Power Cable 3-pin 180cm, Europe type (For power adapter 1757004096-01)
170203180A	Power Cable 3-pin 180cm, UK type (For power adapter 1757004096-01)
1700008921	Power Cable 3-pin PSE Mark 183cm (For power adapter 1757004096-01)
1757004522-01	AC-to-DC Wide Temperature Adapter, DC 12V/3.33A 40W, -20° C ~ 70° C
1702002600-01	Power cable 3-pin 183 cm, USA type (For power adapter 1757004522-01)
1700018705	Power cable 3-pin 183 cm, Europe type (For power adapter 1757004522-01)
1700018704	Power cable 3-pin 183 cm, UK type (For power adapter 1757004522-01)
1700000237-01	Power cable 3-pin 183 cm, PSE type (For power adapter 1757004522-01)
AMK-V003E	ARK-112X series VESA mounting kit
AMK-R001E	ARK-112X series DIN-rail mounting kit
AMK-W001E	ARK-112X series Wall mounting kit